

August 3, 2017

Joshua L. Trader
Project Manager | Design & Construction Division
U.S. General Services Administration
2300 Main Street, Kansas City, MO 64108

RE: Goodfellow Federal Center – Bldg. # 104F Drinking Water Sampling Project # 917004.002

Dear Mr. Trader:

Thank you for the opportunity to provide the General Services Administration (GSA) with the subject assessment. The following is our report.

INTRODUCTION

As requested, OCCU-TEC conducted drinking water testing for the presence of lead and copper at Building #104F of the Goodfellow Federal Center located at 4300 Goodfellow Federal Center in St. Louis, Missouri. Sampling was completed in response to the ongoing environmental condition assessment at the Goodfellow Federal Center complex which is documented at the Goodfellow Federal Center Reading Room located at https://www.gsa.gov/portal/content/212361.

Drinking water sampling was conducted to determine the current levels of lead and copper in representative sources throughout the complex. Drinking water sampling at Building #104F was conducted on June 21, 2017 by Mr. Justin Arnold of OCCU-TEC.

METHODOLOGY

The sampling methodology used during this investigation was developed in general accordance with the United States Environmental Protection Agency's (EPA) "Quick Guide to Drinking Water Sample Collection – Second Edition" developed by the EPA Region 8 in September 2016.

Samples were collected as first draw samples in accordance with the Lead and Copper Rule. First draw samples represent 'worst case' conditions with water that has been stationary within the plumbing systems for a minimum of six hours. The samples were collected in individually labeled 1000 milliliter (mL) plastic bottles capped with Teflon septa lined screw caps. The bottles were filled to the shoulder with water from the sample source. The samples were then placed in a cooler for safe transport. Each sample was acidified at the laboratory as needed.

Drinking water sampling for the presence of lead and copper was conducted at three (3) distinct locations within Building #104F. A total of four (4) samples were obtained. After each drinking water sample was collected, OCCU-TEC filled a separate sample cup with approximately 2 inches of water. OCCU-TEC placed an Oakton model PHTester30 pH meter into the sample cup. After readings stabilized, OCCU-TEC recorded the readings for pH (the acidity or basicity of an aqueous solution) and the temperature (in degrees Celsius) on site specific sample logs.

Drinking water samples were submitted to Eurofins-Eaton Analytical in South Bend, IN for analyses of lead and copper. Eurofins-Eaton Analytical is certified by the State of Missouri Department of Natural Resources (MDNR) as an approved drinking water laboratory. Eurofins-Eaton Analytical's Missouri Certification number is 880.

The drinking water samples were collected using media supplied by Eurofins-Eaton Analytical. Lead and Copper samples were collected and analyzed in accordance with EPA Method 200.8.

RESULTS AND DISCUSSION

The results for the subject testing are summarized in the tables below.

Samples with a "<" sign indicate that the results were below the reportable limit.

Water Sample Summary

Analysis	Lowest Concentration	Highest Concentration	ACTION
			LEVEL*
Lead	0.0011 mg/L	0.0073 mg/L	0.015 mg/L
Copper	0.05 mg/L	1.8 mg/L	1.3 mg/L

^{*}As per EPA Lead and Copper Rule (40 CFR Part 141 Subpart I)

Specific water sample locations are indicated in Appendix A. A summary table of all sampling results by location is included in Appendix B. The complete laboratory report

for the drinking water sampling from Eurofins-Eaton Analytical is attached in Appendix C.

LEAD

All samples were below the Action Level (AL) for lead.

COPPER

One sample (104F-02) had results of 1.8 milligrams per liter (mg/L) which is above the action level for copper. This level would likely be from residual copper leaching from the piping that serves the fixture. All other samples were below the AL for copper.

PH

Normal pH levels for drinking water are between 6.0 to 8.5. Water with a pH < 6.5 is considered acidic, soft, and corrosive. Acidic water may contain metal ions, may cause premature damage to metal piping, and increases the likelihood of leaching. Water with a pH > 8.5 is considered alkaline or basic and can indicate that the water is hard. Hard water does not pose a health risk, but can cause aesthetic problems. These problems include an alkali taste, the formation of scale deposits, and difficulty in getting soaps and detergents to lather.

Recorded pH levels in Building #104F ranged from 9.11 to 9.25 indicating the drinking water is slightly alkaline.

LIMITATIONS

The scope of this assessment was limited in nature. OCCU-TEC collected samples from a select number of drinking water sources in an effort to minimize cost while providing a general overview of the drinking water quality at the site. Sample locations do not encompass every drinking water source at the Site. Additionally, samples were only analyzed for a select number of potential contaminants likely to affect the drinking water quality at the site. OCCU-TEC is not responsible for potential contaminants not identified in this report.

This report was prepared for the sole use of GSA. Reliance by any party other than GSA is expressly forbidden without OCCU-TEC's written permission. Any parties relying on

the report, with OCCU-TEC's written permission, are bound by the terms and conditions outlined in the original proposal as if said proposal was prepared for them.

OCCU-TEC appreciates the opportunity to work with the General Services Administration on this project. Please contact us if you have any questions regarding this report or if we may be of any additional service.

Sincerely,

(b) (6)


Jeff T. Smith Senior Project Manager (b) (6)

Kevin Heriford Project Manager (QA/QC)

ATTACHMENTS

Appendix A, Water Sample Location Diagrams Appendix B, Results Summary by Location Appendix C, Water Sample Laboratory Report

Appendix A Water Sample Location Diagrams

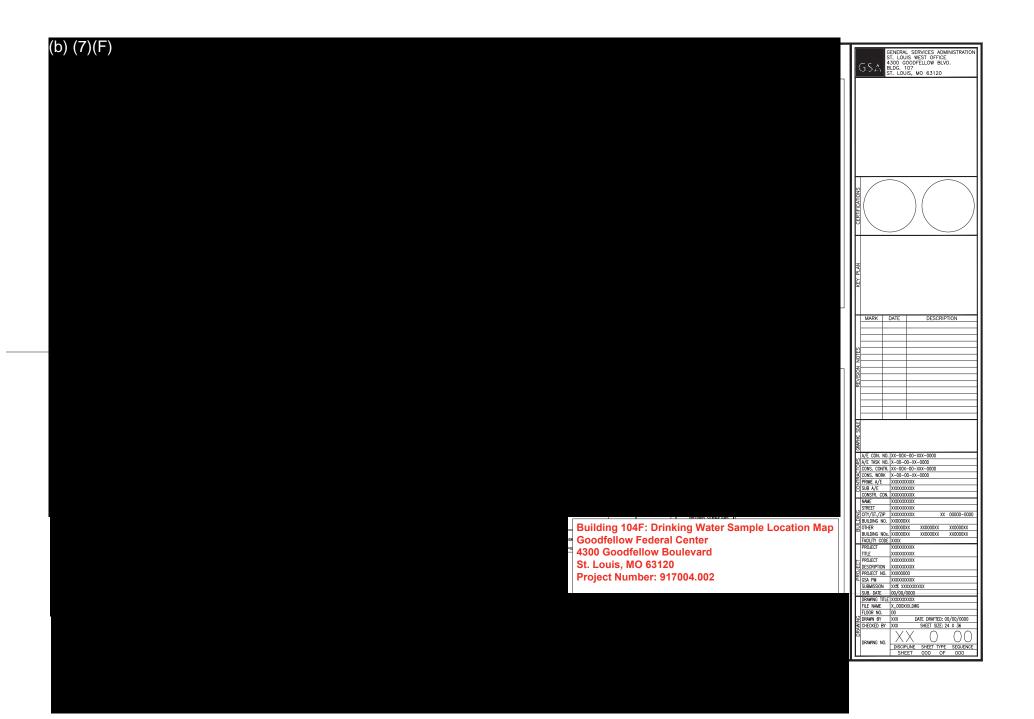

Appendix B Results Summary by Location

	Goodfellow Federal Center - Building 104F												
Sample Number	Location	Water Source	Temperature	рН	Analyte	Result	Units	Above/Below	AL				
104F-01	Drinking fountain asset MOO611 200001 at	Drinking fountain	17.3	9.11	Copper	0.074	mg/L	Below AL	1.3				
1047-01	M-36	Dillikilig Touritaili	17.5	9.11	Lead	0.0015	mg/L	Below AL	0.015				
104F-02	Sink at O-35	Sink	22.6	9.25	Copper	1.8	mg/L	Above AL	1.3				
1047-02	SINK at U-35			9.25	Lead	0.0073	mg/L	Below AL	0.015				
104F-02DUP	Sink at O-35 Duplicate	Sink	22.6	9.25	Copper	0.74	mg/L	Below AL	1.3				
104F-02DOF	Sink at 0-33 Duplicate		22.0	9.23	Lead	0.0061	mg/L	Below AL	0.015				
104F-03	Drinking fountain asset MOO611 at M 26	Desiles (consists	17.4	9.15	Copper	0.05	mg/L	Below AL	1.3				
1041-03	Drinking fountain asset MOO611 at M-36	Drinking fountain	17.4	9.15	Lead	0.0011	mg/L	Below AL	0.015				

Highlight indicates results at or above the Action Level (AL)

Appendix C Water Sample Laboratory Report



LABORATORY REPORT

If you have any questions concerning this report, please do not hesitate to call us at $(800)\ 332-4345$ or $(574)\ 233-4777$.

This report may not be reproduced, except in full, without written approval from EEA.



STATE CERTIFICATION LIST

State	Certification	State	Certification
Alabama	40700	Montana	CERT0026
Alaska	IN00035	Nebraska	NE-OS-05-04
Arizona	AZ0432	Nevada	IN00035
Arkansas	IN00035	New Hampshire*	2124
California	2920	New Jersey*	IN598
Colorado	IN035	New Mexico	IN00035
Colorado Radiochemistry	IN035	New York*	11398
Connecticut	PH-0132	North Carolina	18700
Delaware	IN035	North Dakota	R-035
Florida*	E87775	Ohio	87775
Georgia	929	Oklahoma	D9508
Hawaii	IN035	Oregon (Primary AB)*	4074-001
Idaho	IN00035	Pennsylvania*	68-00466
Illinois*	200001	Puerto Rico	IN00035
Illinois Microbiology	17767	Rhode Island	LAO00343
Indiana Chemistry	C-71-01	South Carolina	95005
Indiana Microbiology	M-76-07	South Dakota	IN00035
lowa	098	Tennessee	TN02973
Kansas*	E-10233	Texas*	T104704187-15-8
Kentucky	90056	Texas/TCEQ	TX207
Louisiana*	LA170006	Utah*	IN00035
Maine	IN00035	Vermont	VT-8775
Maryland	209	Virginia*	460275
Massachusetts	M-IN035	Washington	C837
Michigan	9926	West Virginia	9927 C
Minnesota*	018-999-338	Wisconsin	999766900
Mississippi	IN035	Wyoming	IN035
Missouri	880		

^{*}NELAP/TNI Recognized Accreditation Bodies

Revision date: 05/15/2017



110 South Hill Street South Bend, IN 46617 Tel: (574) 233-4777 Fax: (574) 233-8207 1 800 332 4345

Laboratory Report

Client: OCCU-TEC Inc. Report: 391479

Attn: Kevin Heriford Priority: Standard Written

100 NW Business Park Lane Status: Final

Riverside, MO 64150 PWS ID: Not Supplied

	Sample Information												
EEA ID#	Client ID	Method	Collected Date / Time	Collected By:	Received Date / Time								
3720363	104F-01DFAssetMO0611200001	200.8	06/21/17 05:44	Client	06/26/17 09:45								
3720364	104F-02 Sink Column O35	200.8	06/21/17 05:48	Client	06/26/17 09:45								
3720365	104F-02-Dupe	200.8	06/21/17 05:48	Client	06/26/17 09:45								
3720366	104F-03DFAssetMO0611200006	200.8	06/21/17 05:52	Client	06/26/17 09:45								

Report Summary

Detailed quantitative results are presented on the following pages. The results presented relate only to the samples provided for analysis.

We appreciate the opportunity to provide you with this analysis. If you have any questions concerning this report, please do not hesitate to call Kelly Trott at (574) 233-4777.

Note: This report may not be reproduced, except in full, without written approval from EEA.

(b) (6)

Client Name:

07/12/2017

Date

Authorized Signature

OCCU-TEC Inc.

Report #: 391479

Title

Client Name: OCCU-TEC Inc. Report #: 391479

Sampling Point: 104F-01DFAssetMO0611200001

	Lead and Copper												
Analyte ID#	Analyte	Reg Limit	MRL†	Result	Units	Preparation Date	Analyzed	EEA ID#					
7440-50-8	Copper	200.8	1300 !	1.0	74	ug/L		07/10/17 17:19	3720363				
7439-92-1	Lead	200.8	15.1	1.0	1.5	ug/l		07/10/17 17:19	3720363				

PWS ID: Not Supplied

Sampling Point: 104F-02 Sink Column O35 PWS ID: Not Supplied

Lead and Copper												
Analyte ID #	Analyte	Method	Reg Limit	MRL†	Result	Units	Preparation Date	Analyzed	EEA ID#			
7440-50-8	Copper	200.8	1300 !	1.0	1800	ug/L		07/07/17 23:51	3720364			
7439-92-1	Lead	200.8	15 !	1.0	7.3	ug/L		07/07/17 23:51	3720364			

Sampling Point: 104F-02-Dupe PWS ID: Not Supplied

	Lead and Copper												
Analyte ID #	Analyte	Method	Reg Limit	MRL†	Result	Units	Preparation Analyzed Date		EEA ID#				
7440-50-8	Copper	200.8	1300 !	1.0	740	ug/L		07/07/17 23:53	3720365				
7439-92-1	Lead	200.8	15 !	1.0	6.1	ug/L		07/07/17 23:53	3720365				

Sampling Point: 104F-03DFAssetMO0611200006 PWS ID: Not Supplied

	Lead and Copper												
Analyte ID #	Analyte	Method	Reg Limit	MRL†	Result	Units	Preparation Date						
7440-50-8	Copper	200.8	1300 !	1.0	50	ug/L		07/07/17 23:55	3720366				
7439-92-1	Lead	200.8	15 !	1.0	1.1	ug/L		07/07/17 23:55	3720366				

† EEA has demonstrated it can achieve these report limits in reagent water, but can not document them in all sample matrices.

Reg Limit Type:	MCL	SMCL	AL
Symbol:	*	۸	!

Client Name: OCCU-TEC Inc. Report #: 391479

Lab Definitions

Continuing Calibration Check Standard (CCC) / Continuing Calibration Verification (CCV) / Initial Calibration Verification Standard (ICV) / Initial Performance Check (IPC) - is a standard containing one or more of the target analytes that is prepared from the same standards used to calibrate the instrument. This standard is used to verify the calibration curve at the beginning of each analytical sequence, and may also be analyzed throughout and at the end of the sequence. The concentration of continuing standards may be varied, when prescribed by the reference method, so that the range of the calibration curve is verified on a regular basis. CCL, CCM, and CCH are the CCC standards at low, mid, and high concentration levels, respectively.

Internal Standards (IS) - are pure compounds with properties similar to the analytes of interest, which are added to field samples or extracts, calibration standards, and quality control standards at a known concentration. They are used to measure the relative responses of the analytes of interest and surrogates in the sample, calibration standard or quality control standard.

Laboratory Duplicate (LD) - is a field sample aliquot taken from the same sample container in the laboratory and analyzed separately using identical procedures. Analysis of laboratory duplicates provides a measure of the precision of the laboratory procedures.

Laboratory Fortified Blank (LFB) / Laboratory Control Sample (LCS) - is an aliquot of reagent water to which known concentrations of the analytes of interest are added. The LFB is analyzed exactly the same as the field samples. LFBs are used to determine whether the method is in control. FBL, FBM, and FBH are the LFB samples at low, mid, and high concentration levels, respectively.

Laboratory Method Blank (LMB) / Laboratory Reagent Blank (LRB) - is a sample of reagent water included in the sample batch analyzed in the same way as the associated field samples. The LMB is used to determine if method analytes or other background contamination have been introduced during the preparation or analytical procedure. The LMB is analyzed exactly the same as the field samples.

Laboratory Trip Blank (LTB) / Field Reagent Blank (FRB) - is a sample of laboratory reagent water placed in a sample container in the laboratory and treated as a field sample, including storage, preservation, and all analytical procedures. The FRB/LTB container follows the collection bottles to and from the collection site, but the FRB/LTB is not opened at any time during the trip. The FRB/LTB is primarily a travel blank used to verify that the samples were not contaminated during shipment.


Matrix Spike Duplicate Sample (MSD) / Laboratory Fortified Sample Matrix Duplicate (LFSMD) - is a sample aliquot taken from the same field sample source as the Matrix Spike Sample to which known quantities of the analytes of interest are added in the laboratory. The MSD is analyzed exactly the same as the field samples. Analysis of the MSD provides a measure of the precision of the laboratory procedures in a specific matrix. SDL, SDM, and SDH / LFSMDL, LFSMDM, and LFSMDH are the MSD or LFSMD at low, mid, and high concentration levels, respectively.

Matrix Spike Sample (MS) / Laboratory Fortified Sample Matrix (LFSM) - is a sample aliquot taken from field sample source to which known quantities of the analytes of interest are added in the laboratory. The MS is analyzed exactly the same as the field samples. The purpose is to demonstrate recovery of the analytes from a sample matrix to determine if the specific matrix contributes bias to the analytical results. MSL, MSM, and MSH / LFSML, LFSMM, and LFSMH are the MS or LFSM at low, mid, and high concentration levels, respectively.

Quality Control Standard (QCS) / Second Source Calibration Verification (SSCV) - is a solution containing known concentrations of the analytes of interest prepared from a source different from the source of the calibration standards. The solution is obtained from a second manufacturer or lot if the lot can be demonstrated by the manufacturer as prepared independently from other lots. The QCS sample is analyzed using the same procedures as field samples. The QCS is used as a check on the calibration standards used in the method on a routine basis.

Reporting Limit Check (RLC) / Initial Calibration Check Standard (ICCS) - is a procedural standard that is analyzed each day to evaluate instrument performance at or below the minimum reporting limit (MRL).

Surrogate Standard (SS) / Surrogate Analyte (SUR) - is a pure compound with properties similar to the analytes of interest, which is highly unlikely to be found in any field sample, that is added to the field samples, calibration standards, blanks and quality control standards before sample preparation. The SS is used to evaluate the efficiency of the sample preparation process.



Eaton Analytical

110 S. Hill Street South Bend, IN 46617 T: 1.800.332.4345 F: 1.574.233.8207

Order # 321120

tch# 391470

www.EurofinsUS.com/	Eaton				C		Page	. 1	of 1						
	led area for EE/	A use only				TIAIN OF	00310	DDY RECO	K. 184988				. 01-		-
REPORT TO:				SAMPLER (Signatu	ıre)			PWS ID#	STATE (sample origin)	PROJECT NAME	Р	PO#			
Occu-Tec 100 NW Business	Park Lane, River	side, MO 64150		(b) (6)				DW	МО	917004.02 164F					
BILL TO: Accou	ints Recievin	ng			Yes	No	POPU	ILATION SERVED	SOURCE WATER				RS		IM
	100 NW Business Park Lane, Riverside, MO 64150			CØMPLIANCE MONITORING		X			DW				CONTAINERS	MATRIX CODE	TURNAROUND TIME
LAB Numbe			N							CHIOS	RINATED	CO	XX	IAR	
LAB Numbe					SAMPLING SITE			TEST NA	ME	SAMPLE REMARKS			OF	ATE	L N
1 3720,36			AM PM	104F-01	OF A LA		,	1.0	_	รพ	YES	NO	#	Σ	F
2 36		-17 5:48	-		OF Asset N	100011 200001	L	ead + Coppes		5W	X	-	1		1
-1		1-17 5:48	3		Sink Column	035					Ķ		\perp		
			K	104F-02-0ype	. 1			1		SW	Χ,		Ι,		
4 V 36	16-4	-17 5:52	X	104F-03 DF	Asset MODELL	200006				SW	X		1		
5			++-											_	-
6			++				-								
7			++-											_	-
8															_
9			+			t									-
10			+												-
11			+											_	_
12			++-												-
13															
14															
RELINQUISHED BY:	(Signature)	DATE	TIME	RECEIVED BY:(Sig	gnature)	DATE	TIME	I AR RESERV	ES THE RIGHT TO RETURN UN	ISED PORTIONS OF NON-A	OUEOUS	SAMDI ES TI	CLIENT		
(b) (6)			1		200 - 14-00-4			LAB COMMENTS		and a surraine or many	402000			-	-
			AM PM	-			AM PM								
RELINGUISHED BY:	(Signature)	DATE	TIME		gnature)	DATE	TIME								
//			4												
V			AM PM	-			AM PM								
RELINQUISHED BY:	(Signature)	DATE	TIME		BORATORY BY:	DATE	TIME	CONDITIONS UPON R	FORINT (-V-st)	7 - 1- 1					
				(b) (6)			MAUL					X			
			AM PM			6-2617	AM PM	lced: We	t/BlueX_Ambient	C Upon I	Receipt		N/A		
MATRIX	X CODES:	TURN-AR		ME (TAT) SURCHAR	RGES		PAINT T.M.						_	_	
DW-DRINKING WATER SW = Standard Written: (1			rd Written: (15	5 working days) 0%		IV* = Immediate	e Verbal: (3 wor	king days) 100%							
	SENT WATER UND WATER	RV* = Rush Ve	erbal: (5 worki	ing days) 50%		IW* =Immediate	e Written: (3 wo	Written: (3 working days) 125%			Samples received unannounced with less				
EW-EXPOS	SURE WATER	RW* = Rush V	Vritten: (5 worl	rking days) 75%		SP* = Weekend	110	CALL		than 48 hours holding time remaining may be subject to additional charges.					
PW-POOL WW-WAST	WATER	-				STAT* = Less II	han 48 hours	CALL							
VVVV-VVA5	TE WATER	* Please ca	III, expedite	ed service not available	le for all testing					06-LO-F0435 Issue (0.0 Effe	ective Date	e: 2016-	-09-20	